



Features

IP-66 Waterproof , Color option

Easy assemble with self-tapping screw for pcb

157 lm/W , 4mm thickness tempered glass

Application up to 150 watts

Technical Specification

Frame, Side Connection

Tempered Glass

Driver Cover

Housing

Reflector


Laser Cutting Bending with Powder Coating

IK08, with Holes, Silk Screen

Aluminium Die Casting (optionally powder coating)

Aluminium Die Casting (optionally powder coating)

PMMA, White

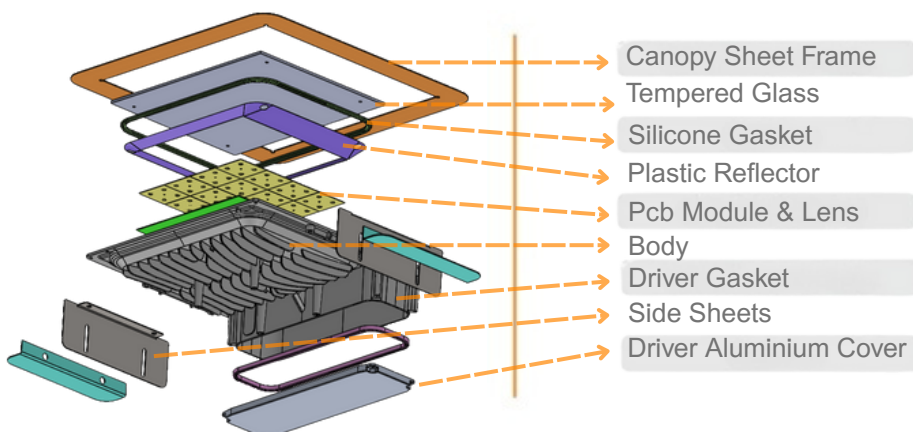

Lens Options

3x2 lens

4x3 lens

4x4 lens

Led Module Options

Rec-AC1-247x201x1,6-DSSx96-P4524 (100W)

Rec-AC1-247x201x1,6-DSSx192-P8524 (150W)

Rec-AC1-247x201x1,6-DSSx256-P8532 (High Efficiency)

Driver Options

X6E-100M214-6

100W or 150W (X6E-150M214-6)

150W (X6E-159M214-6)



Gas stations



Parking lots



Shopping mall entrances



Warehouses and loading areas



Building entrances



Garages

