



Features

IP-66 Waterproof , Color option

Easy assemble with self-tapping screw for pcb

157 lm/W , 4mm thickness tempered glass

Application up to 150 watts

Technical Specification

Frame, Side Connection

Tempered Glass

Driver Cover

Housing

Reflector

Laser Cutting Bending with Powder Coating

IK08, with Holes, Silk Screen


Aluminium Die Casting (optionally powder coating)

Aluminium Die Casting (optionally powder coating)

PMMA, White

2. Mounting Option

Available in two types
ceiling-mounted (1) and
wall-mounted (2) .

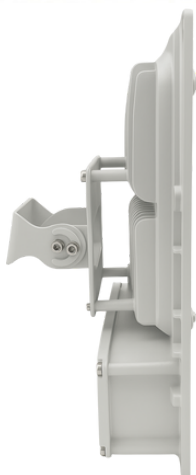

1



2

Lens Options

3x2 lens

4x3 lens

4x4 lens

Led Module Options

Rec-AC1-247x201x1,6-DSSx96-P4524 (100W)

Rec-AC1-247x201x1,6-DSSx192-P8524 (150W)

Rec-AC1-247x201x1,6-DSSx256-P8532 (High Efficiency)

Driver Options

X6E-100M214-6

100W or 150W (X6E-150M214-6)

150W (X6E-159M214-6)



Sports
Areas



Football
Fields



Parking
Lots




Parks &
Gardens

PR-100

powered by sarnikon

sarnikon

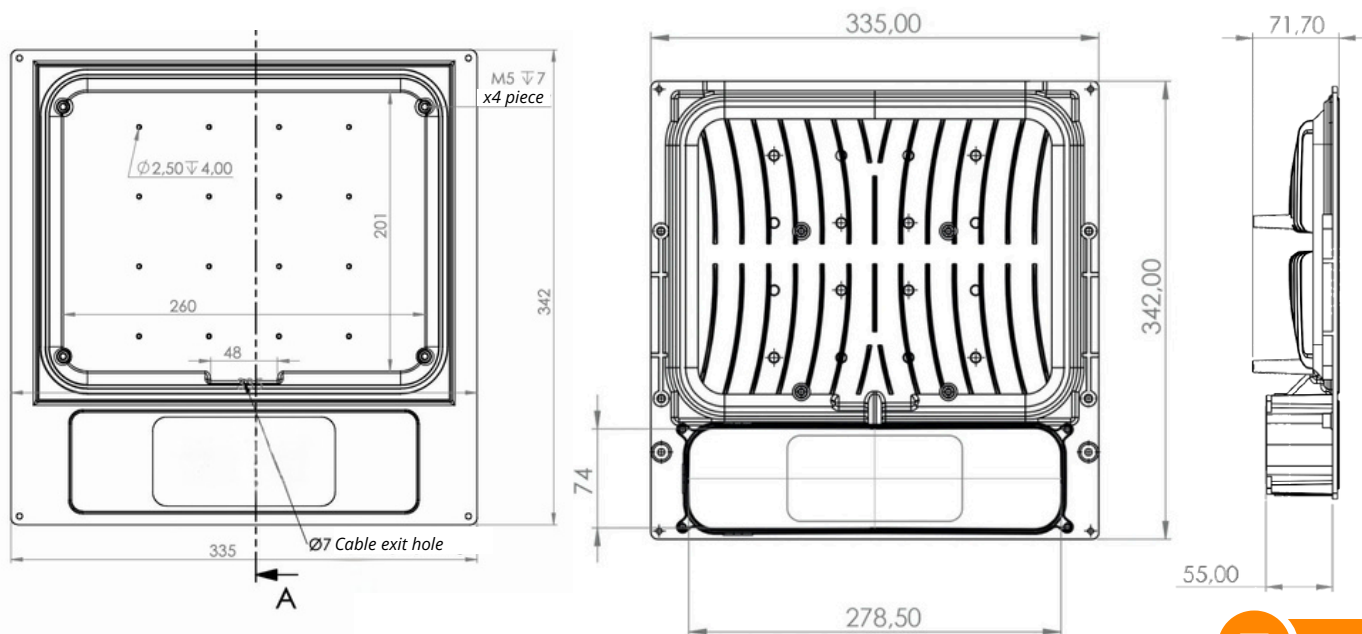

CONTACT US



This product is available with multiple mounting options depending on the installation needs.

Note: These illustrations were created to showcase high-quality images of the product. Actual color or texture may slightly vary.