


LP-75



Applications

Decorative lighting

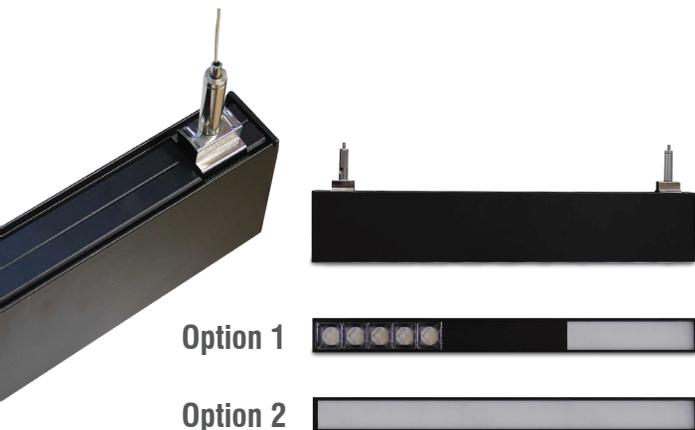


Features

Cost effective & efficient lighting solution for a fast return on investment

Effective deising to reach maximum cooling capacity

Wide range of sizes and mounting options

Without dismantling the whole armature, only the led module can be replaced

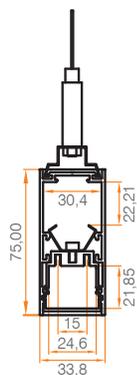

PRODUCT CHARACTERISTICS

Heatsink Profile

6063 Quality Aluminium Profile (Anodized / Painted)

Material of Side Lid

Etial 150 Quality Electrostatic Paint Aluminium

Material of Up Lid

Plexi

Other led lighting products compatible with our LP-75 products.

	POWER	LED MODULE	DRIVER	LENS
Option 1	23 Watt	LNR-AL1-132*20*1.6-SQRx05 (4 pcs)	ELEMENT 40/220.. 240/350 D CS L (350 ma)	REFLECTOR & DIFFUSER
	45 Watt	LNR-AL1-132*20*1.6-SQRx05 (6 pcs)	OT FIT 75/220.. 240/550 D NFC L (500 ma)	REFLECTOR & DIFFUSER
Option 2	21 Watt	LN-A1-300*16-DS5X12 (2 pcs)	ELEMENT 40/220... 240/350 D CS L (300 ma)	DIFFUSER
	43 Watt	LN-A1-300*16-DS5X12 (4 pcs)	ELEMENT 60/220... 240/350 D CS L (300 ma)	DIFFUSER