



Features

Aluminium body with efficiency cooling

Easy montage, IP66 dust and waterproof

168 L/w low Ugr Lens

80-200W wattage size

Technical Specification

Frame, Side Connection

Tempered Glass

Driver Cover

Housing

Reflector

Laser Cutting Bending with Powder Coating


IK08, with Holes, Silk Screen

Aluminium Die Casting (optionally powder coating)

Aluminium Die Casting (optionally powder coating)

PMMA, White


Assembly

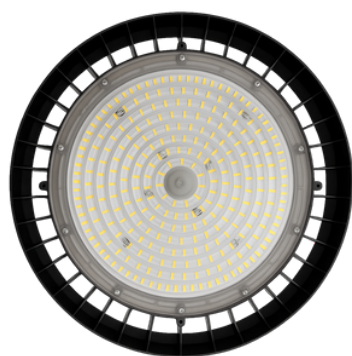

Lens



Led Module

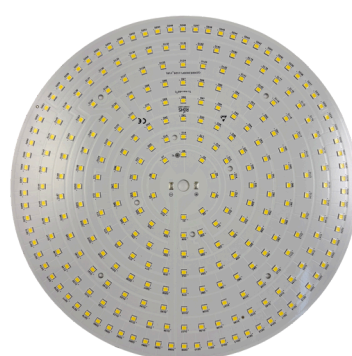

Housing Code

HB-100

HB-150

HB-200

Lens Options

SL-UFO-D226

SL-UFO-D265

SL-UFO-D265

Angle

60 or 90

60 or 90

60 or 90

Driver Options

100W-G6-120V-260T

150W-G6-160V-260T

200W-G6-200V-260T



Factory




Workshop



Logistics



Production
Facilities

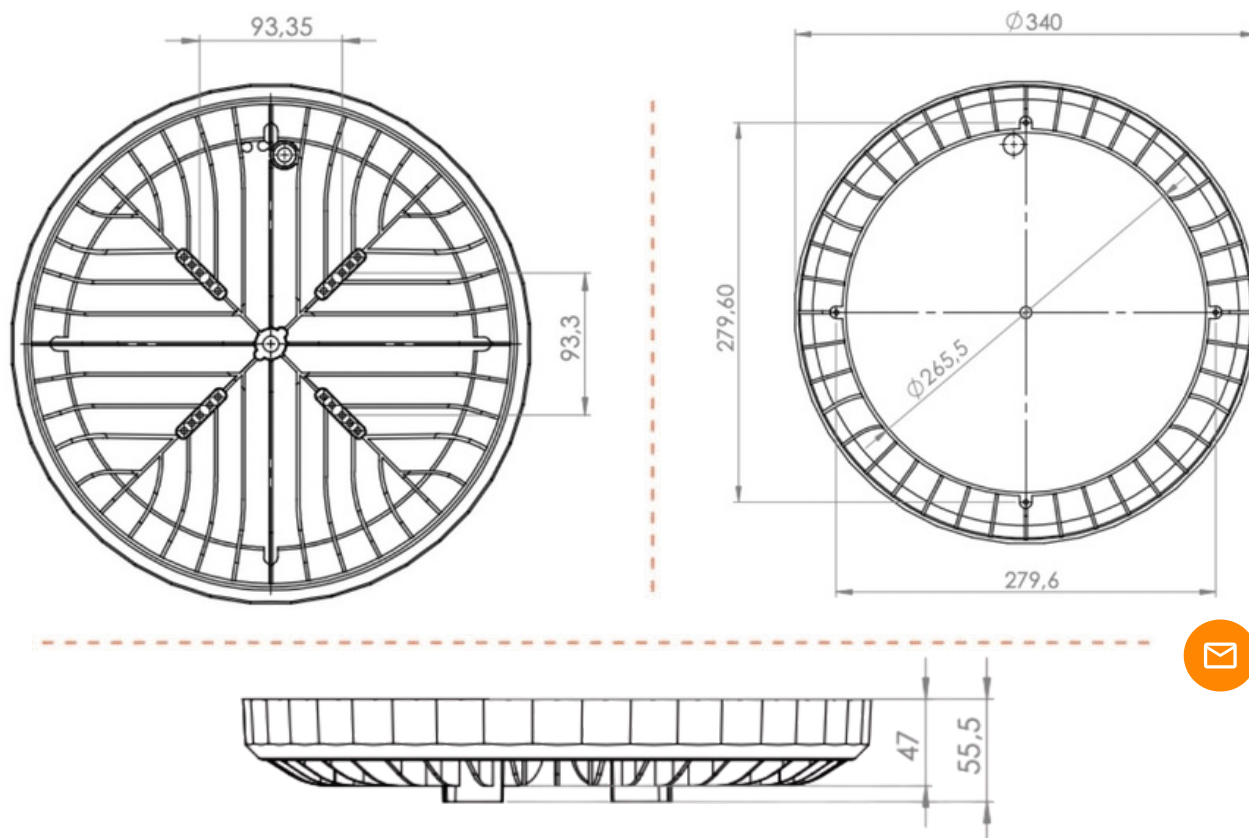

CONTACT US



Note: Illustrations in this brochure were created to showcase high-quality images of the product. Actual color or texture may slightly vary.