

SKL-60 OUTDOOR HOUSING



IP-67 **Nema Socket**



Applications

Urban & Residential Streets



Features

- Easy Mounting and Cabling
- Easy Access to Pcb and Driver Area
- IP67 Compatible
- Up To 100W
- IK08 Certified, 4mm Thickness of Clear Tempered Glass
- Adjustable Joint Arm Angles
- ANSI C136 And Zhaga Book 18 Competible Nema Socket

PRODUCT CHARACTERISTICS

Heatsink Profile

Etial 140-150 Aluminum

Material of Cover


Etial 150 Aluminum

Material of Gasket

GE Bayar SiliCONES, Vulkanize, Shore-A

Material of Joint Arm

Injected Aluminium + Electrostatic Painted

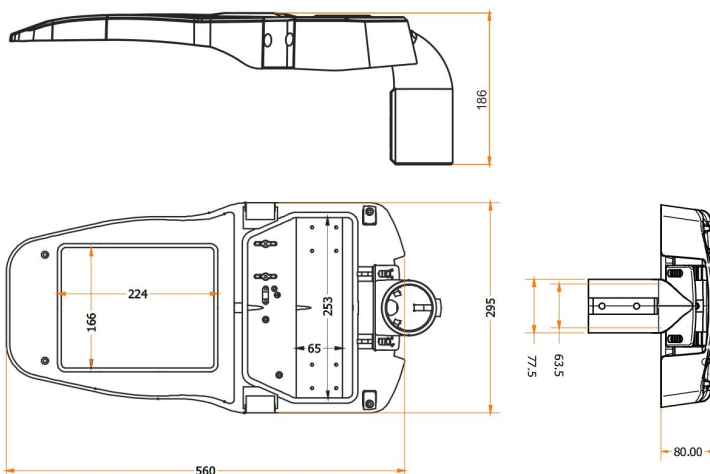

Other LED lighting products compatible with our SKL-60 products.

POWER	LED MODULE	DRIVER	LENS
60 Watt	LNR-A1-158*221-SQRx48	OT 100/220.. 240/1A4 1DIM P7 (400 ma)	KHATOD 2x2 KNAC0406ASM
80 Watt	LNR-A1-158*221-SQRx48	OT 100/220.. 240/1A4 1DIM P7 (520 ma)	KHATOD 2x2 KNAC0406ASM
100 Watt	LNR-A1-158*221-SQRx48	OT 100/220.. 240/1A4 1DIM P7 (650 ma)	KHATOD 2x2 KNAC0406ASM